


Hydraulic Surface Grinder (JUMBO)

Offering a wide range of surface grinding machine, hydraulic surface grinding machine, hydraulic grinding machine.

Features

- Low energy consumption
- Trouble free performance
- Long working life

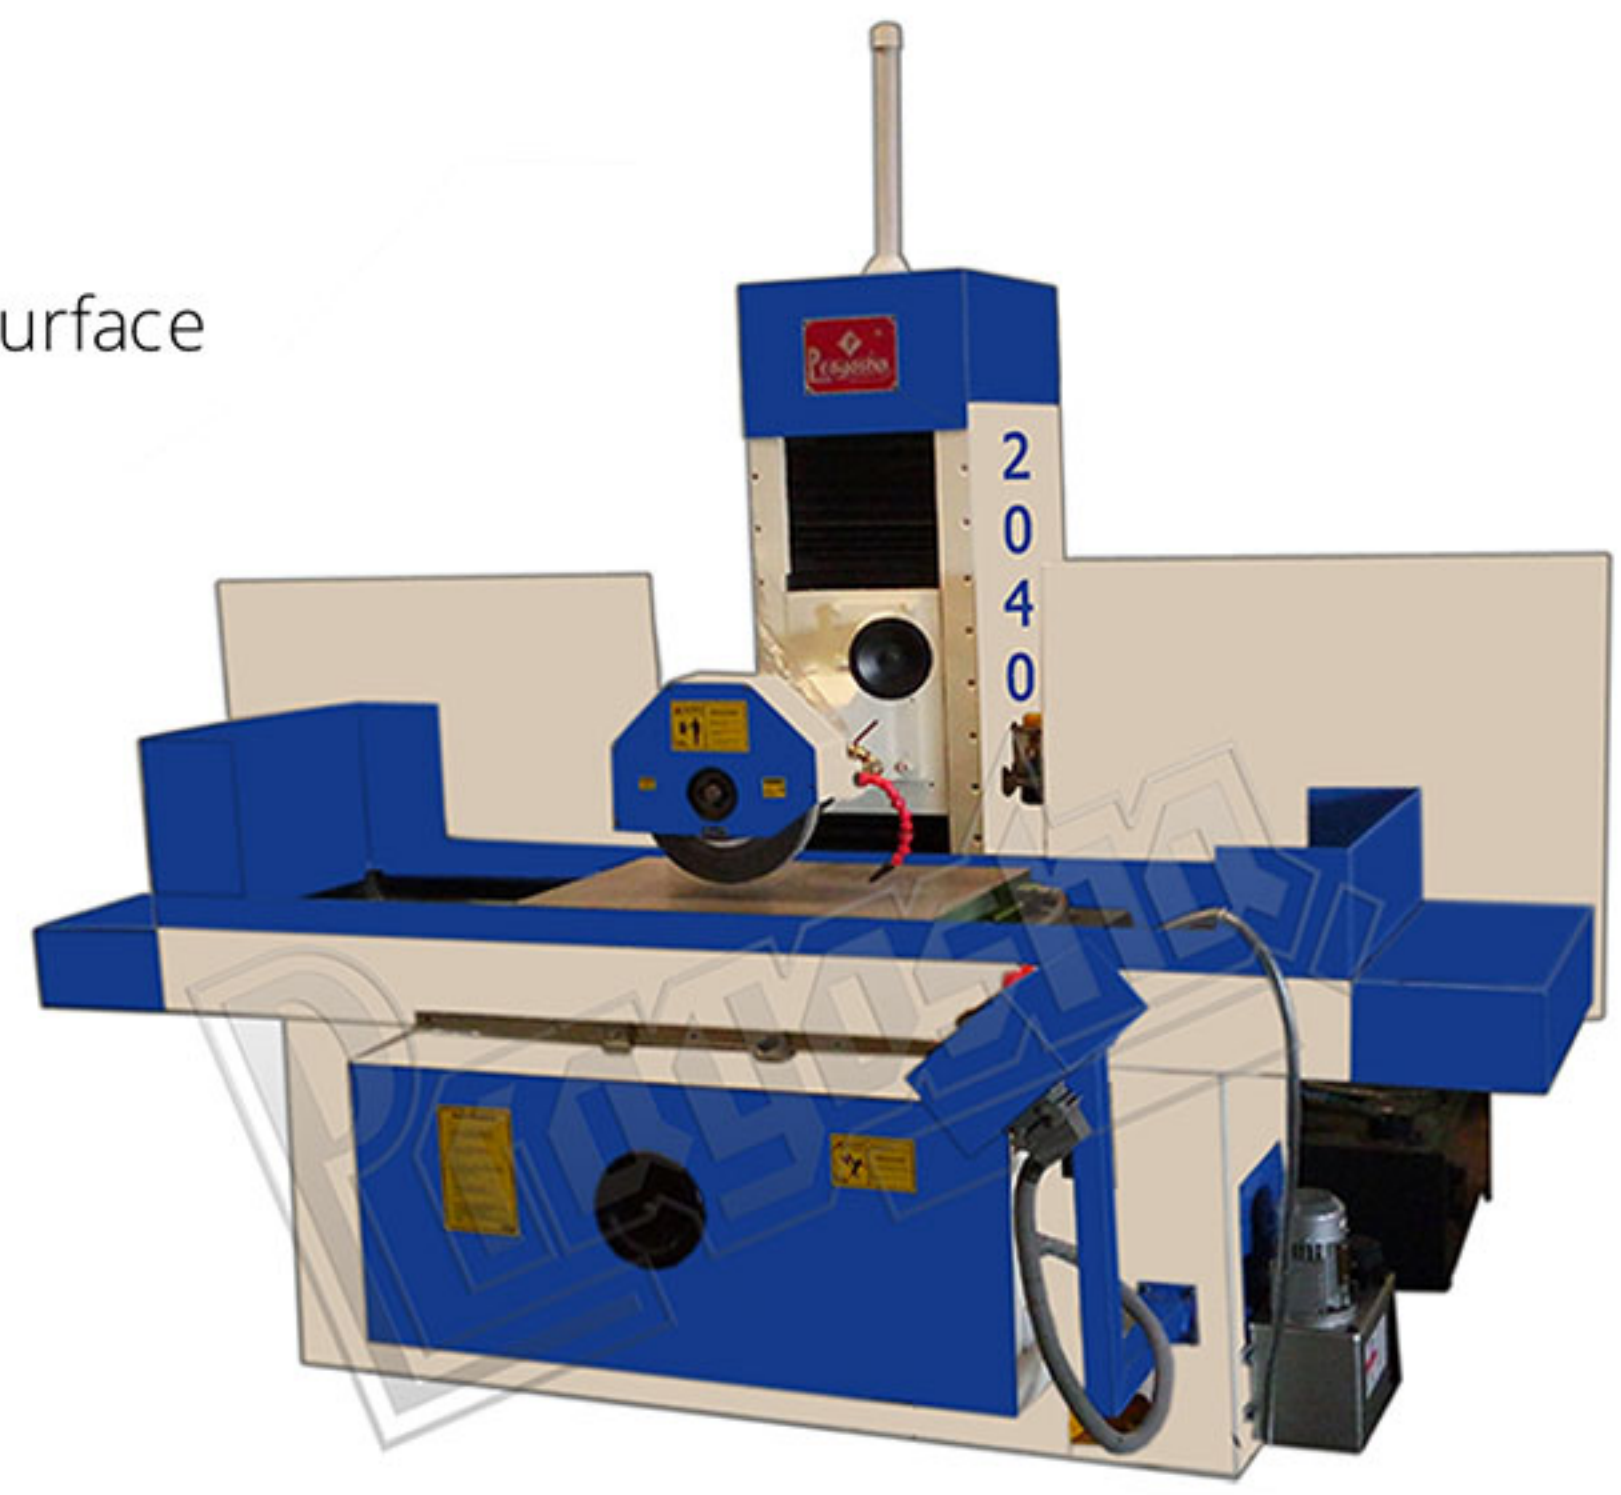

Technical Specification

CAPACITY		PH 2040	PH 2060	PH 2448	PH 3060
Max. Table Size	mm	500 x 1000	500 x 1500	600 x 1200	750 x 1500
Max. Longitudinal Travel	mm	1075	1575	1275	1575
Max. Cross Transverse	mm	550		650	800
Max. Spindle Center Height above Table	mm	550	750		
SPEED AND FEEDS					
Max. Table Speeds	m/min.	1.5-18			
Power Cross Transverse	mm/min	1500			
Auto Cross Feed at each Table Reversal (Infinitely variable)	mm	0.5 to 10			
Least Count of Vertical feed head wheel	mm	0.002			
GRINDING HEAD					
Size of Grinding Wheel	mm	400 x 50 x 127			
Power of Spindle Motor	HP	5	7.5	10	
Speed of Grinding Spindle	RPM	1400			
HYDRAULIC SYSTEM					
Working Pressure	Kg/Cm	30			
Motor	HP	5			7.5
Tank Capacity	Ltrs.	150			200
<p>Note: - We reserved the right for any modification in machine without prior notice & showing all parts are not of standard accessories.</p>					
Machine is Tasted as per IS: 2743:1992			ISO: 1986:1985		